



Cat5e & Cat6 Gear
 CATV Distribution
 CCTV Equipment
 CCTV Over Fiber
 Coaxial Cable
 Connectors & Adapters
 Ethernet Over Coax
 Ethernet Over Fiber
 Ethernet Switches
 Fiber Optic Equipment
 HDBaseT™ Distribution
 HDTV Distribution
 Headend Equipment
 Home Theater Accessories
 IP Distribution
 IP Cameras & Software
 IP Surveillance
 Modulators
 Network Video Recorders
 Racks & Cabinets
 Satellite Distribution Equip.
 Speakers & Audio Gear
 Television Mounts
 Test Equipment
 Tools
 UPS Battery Backups
 Video Baluns
 Wire & Cable



Catalog Version NP121
 Fall 2016

New Products From NACE Brands

CCTV Meters, Recorders, HD & IP Cameras

Pages 11 - 16



SECURITYTRONIX®
 THE IMAGE OF QUALITY



DATA-TRONIX®

USB Charging
Wall Plates



Multi Source to Multi Point HD Video
 Over Your Network



See
 Page 2

New Audio Mixing Amplifier & 70V Speakers



NACE Website



NACE Catalog



NACE Brands

Toll Free Order Line **(800) 688-9282**

web: www.nace.tv email: sales@nace.tv

West Chester, PA

St. Peters, MO

Las Vegas, NV

DATA-TRONIX® DT-USBWP-DUAL-**A-WH

USB Charging Wall Plates For AC Outlets


The USB Charging Solution

Features:

- Replaces existing outlet wall plate in seconds
- Charge two devices simultaneously
- Fast Charge devices which support Fast Charging
- Leaves both wall outlets free for household devices
- 15A and 20A Models now available
- Make any standard AC outlet USB compatible in seconds
- Fits over existing standard AC wall outlet
- No wiring & no batteries
- AC Outlet not included
- Single gang
- ETL Rated
- For residential grade outlets
- White finish



The Data-Tronix Dual USB Charger is incorporated into a sleek duplex wall plate which installs literally in seconds. Simply remove the old standard wall plate and replace it with the USB wall plate using a single screw. The new USB wall plate will make electrical connections with the outlet automatically. With 3100mA total power output, it has the power to charge virtually every phone and tablet on the market. 15 Amp and 20 Amp versions are now available.

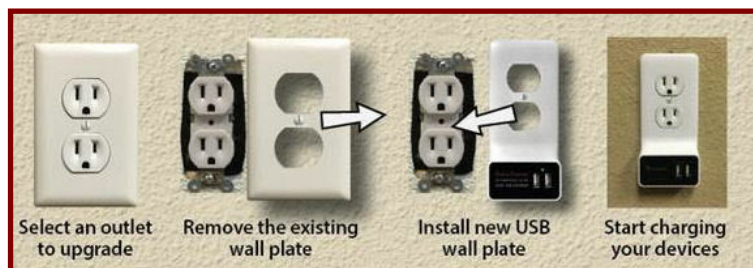

DT-USBWP-DUAL-15A-WH

15 Amp

\$21.99 ea. 1-9

\$19.99 ea. 10-49

\$17.99 ea. 50+

DT-USBWP-DUAL-20A-WH

20 Amp

\$23.99 ea. 1-9

\$21.99 ea. 10-49

\$19.99 ea. 50+



Ordering Information:

DT-USBWP-DUAL-15A-WH


DT-USBWP-DUAL-20A-WH

USB Charging Wall Plate for 15A Outlets

USB Charging Wall Plate for 20A Outlets

NACE (800) 688-9282 Fax: (800) 230-1793

email: sales@nace.tv web: www.datatronix.biz www.nace.tv

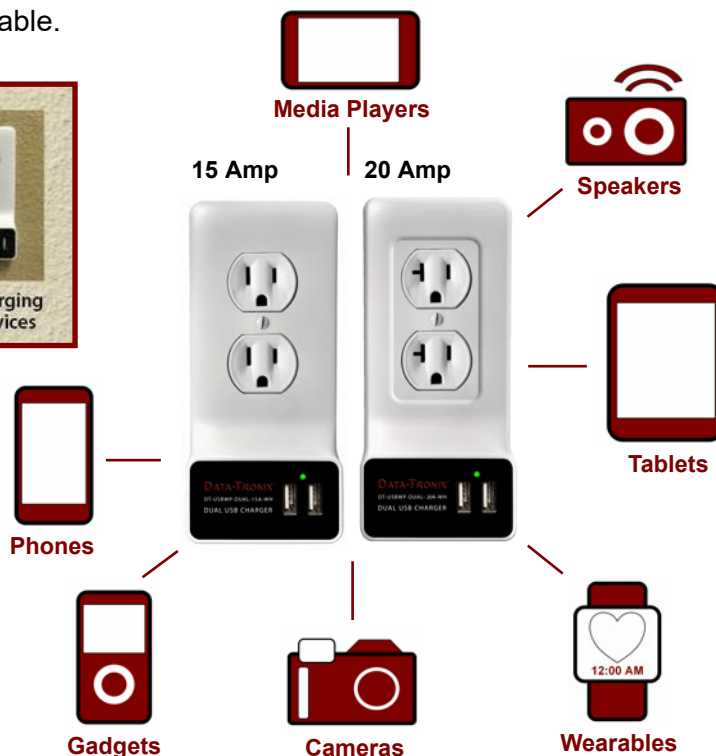


DISTRIBUTE HD VIDEO ANYWHERE ON YOUR LAN

Send any source to any destination instantly, controlled by an iPad, Laptop or PC.

Features:

- Distribute encoded HD video to any point on a LAN, works on an existing network
- Add a decoder and HDMI monitor at any point on the LAN
- Freely add, remove or relocate sources and monitors at any time
- Create groups to easily send a source to multiple destinations
- PC, Laptop and iPad control allow control from any place on the LAN
- Central control client user interface over a computer or mobile device
- Perfect for sports books, arenas, convention centers, retail, bars, and restaurants with large TV systems
- Lower cost and more flexible than traditional matrix switchers
- Create up to a 40 input x 176 output distributed video matrix
- HDMI encoder inputs and decoder outputs
- Separate audio output for venue audio systems
- Fast and virtually seamless switching
- RS-232 control
- PoE
- Consumer Electronics Control (CEC)
- Controller Application Program Interface (API)
- Up to 1080P

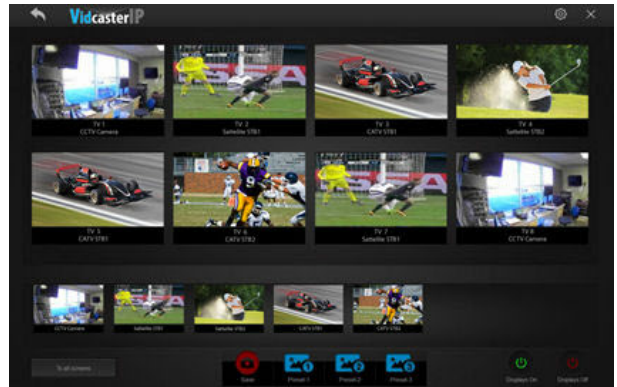

Screen shot of VidCasterIP control app with 5 sources and 8 destinations

The Data-Tronix VidCasterIP is a hardware-based system for the distribution of HD audio/video content over existing IP networks. This solution allows properties to utilize their existing IP infrastructure to add HD video distribution without the additional expense of installing new wiring. The VidCasterIP system is designed for use in a wide variety of applications such as sports books, arenas, convention centers, conference rooms, retail, bars, and restaurants with large TV systems. Operation is as simple and intuitive as using an iPad or PC. The VidCasterIP system can be scaled to a matrix size of 40 HD inputs and as many as 176 HD display screens. With this budget friendly approach, the operator can scale a system's size over time by adding additional HD sources and receive points as the need and budget allows.

Simple hardware

The VidCasterIP system consists of 3 types of devices:

- **Encoders** (transmitters) receive an HDMI signal from a video source such as a digital signage player, Blu Ray® player*, set top box, CCTV camera, etc. The transmitter encodes the signal and places it on the network where it may be decoded at any point on the LAN.
- **Decoders** (receivers) receive the signal from the network and convert it back to HD video. The HDMI output of the decoder is connected to an HDMI-compliant TV or monitor for viewing content up to 1080P resolution.
- **Control Box** (One per system) The VidCasterIP Control Box receives routing commands from a user interface, such as an iPad or PC on the network, then communicates which signal each decoder should display. This solution allows the operator the advantage of creating "display groups" to allow multiple endpoints to receive instantaneous content changes via one operator command. For example, placing one of several sources (a set top box with the big game on) to all, or only to specific TVs, while placing other programming to other TVs.



NACE (800) 688-9282 Fax: (800) 230-1793


email: sales@nace.tv web: www.datatronix.biz www.nace.tv

VidcasterIP

Virtual Video Matrix

VidCasterIP HD Video Streaming Transceivers

Stream HD video / audio content over existing IP networks with centralized control

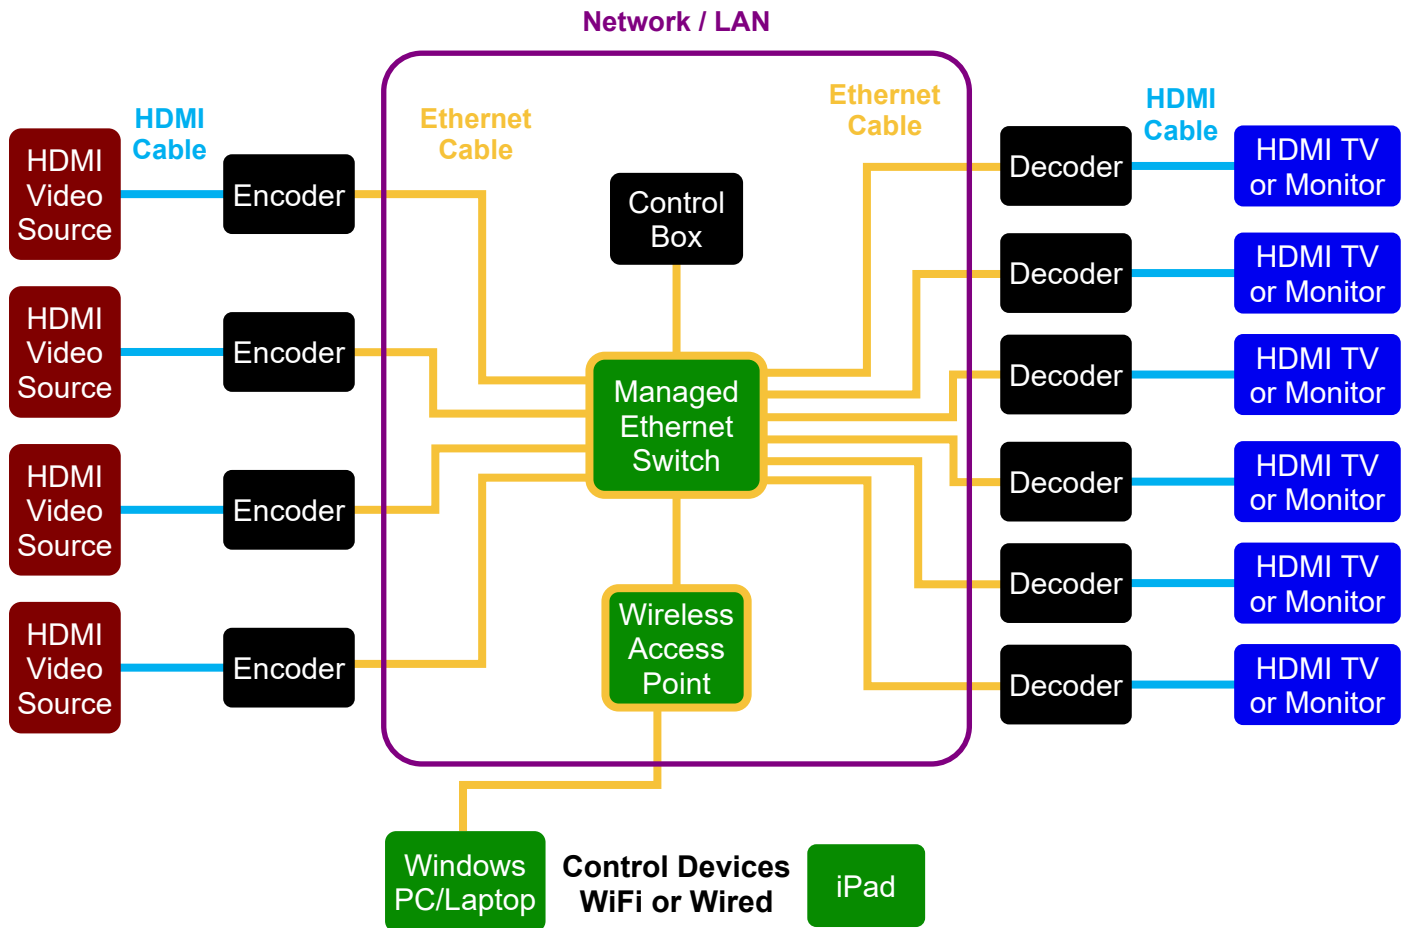

DT-HDVD-IPSTR-ENC VidCasterIP Encoder / Transmitter

DT-HDVD-IPSTR-RX VidCasterIP Decoder / Receiver

Ordering Information:

DT-HDVD-IPSTR-ENC	VidCasterIP Encoder / Transmitter
DT-HDVD-IPSTR-RX	VidCasterIP Decoder / Receiver
DT-HDVD-IPSTR-CB	VidCasterIP Streaming device control box
DT-HDVD-IPSTR-8PK	Rack shelf to hold up to 8 encoders

DATA-TRONIX is a registered trademark of NACE in the United States and/or other countries.

* The names of actual companies, products and technologies mentioned herein may be trademarks of their respective owners.

NACE (800) 688-9282 Fax: (800) 230-1793
email: sales@nace.tv web: www.datatronix.biz www.nace.tv



DT-HDVD-M2MLT Series HD Streaming Transmitter & Receiver

Features:


- Distributes multi-point to multi-point HDMI signal over an ethernet
- Extends transmission distance up to the full operating distance of the ethernet.
- Capable of point to point with one transmitter and one receiver
- Features H.264 compression
- Supports resolutions up to 1080p @ 60HZ, with data transmission speed up to 2.25 Gbps
- Supports LPCM audio format, sample rate 48 kHz
- Complies with TCP/IP protocol for transmission, with streaming bit rates up to 15Mbps.
- HDCP compliant
- Supports RS232 pass through
- Supports Wide-band IR (38 kHz ~ 56 kHz)
- DHCP, automatic assignment for Transmitter and Receiver

DT-HDVD-M2MLT-ENC
\$149.00 ea.

DT-HDVD-M2MLT-RX
\$99.00 ea.



The DT-HDVD-M2MLT Series is an HD Video Streaming set which includes an HDMI transmitter and HDMI receiver for real-time distributing of up to 1080p video over an ethernet. This HDMI over IP Extender uses H.264 compression. The units can be used in a point to point application to distribute a single HDMI source to a single video receive site or in a multi-point to multi-point application to distribute HDMI sources to multiple receive sites using an external Ethernet. They support transmission up to 330' over a single cat5e/6 cable when the TX and RX are connected directly using an Ethernet cable (no switch) also known as point to point. When using an Ethernet switch topology, the signal transmission length will be consistent with Ethernet distance limitations. For extremely long runs, fiber optic transmission systems can be employed. Both the transmitter and receiver are powered via a local DC power supply (included).

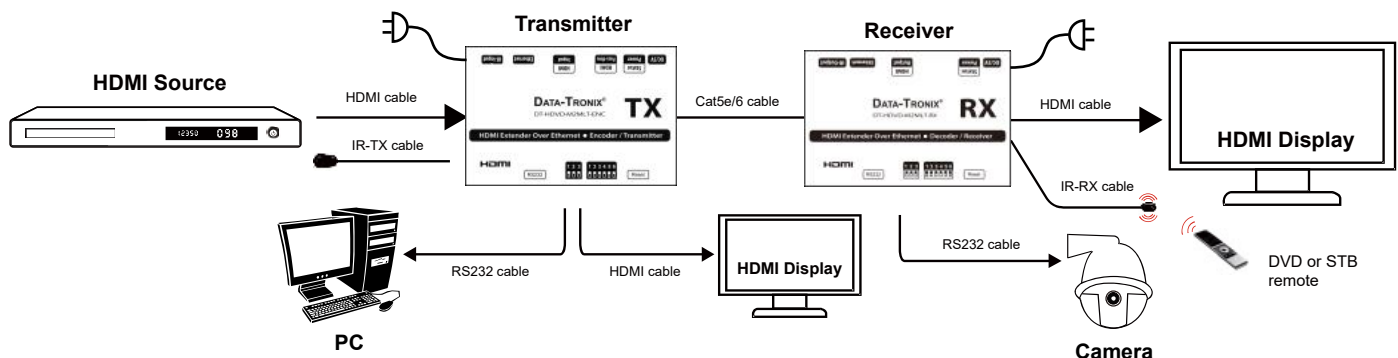

Ordering Information:

DT-HDVD-M2MLT-ENC
DT-HDVD-M2MLT-RX

H.264 HDMI Video Encoder
H.264 HDMI Video Decoder

DATA-TRONIX®

DT-HDVD-M2MLT Series HD Streaming Transmitter & Receiver

Specifications:

Performance

Protocol	H.264 encoding over TCP/IP
Video format	480i/480p/576i/576p/720p/1080i/1080p@60HZ
Audio format	LPCM, Audio sampling rate 48kHz
Streaming Bit Rate	15Mbps
HDCP	Compliant
IR Frequency	38 -56 kHz
RS232 Baud rate	2400 (default) - 115200

IP setting & Group ID setting

Default IP	TX: 192.168.1.11 ; RX: 192.168.1.12
Group ID	Group 00 - group 63
Request for Switch/Router	Supports IGMP, supports DHCP

Environmental & Power Requirements

Operating temperature	23° to 95°F
Operating Humidity Range	5% to 90%RH (No Condensation)
Power supply	5V DC 1A
Power consumption	Max 3 watt

Physical


Dimension	4.7"x3.1"x1.1"
Net Weight	TX: 0.6 lbs. : RX:0.6 lbs.

Connectors on Transmitter

Input	1xHDMI Female port
Output	1x RJ45 output , 1x HDMI loop through
RS232	DB9 Female port
IR	IR TX port

Connectors on Receiver

Input	1xRJ45 input
Output	1x HDMI Female port
RS232	DB9 Male port
IR	IR RX port

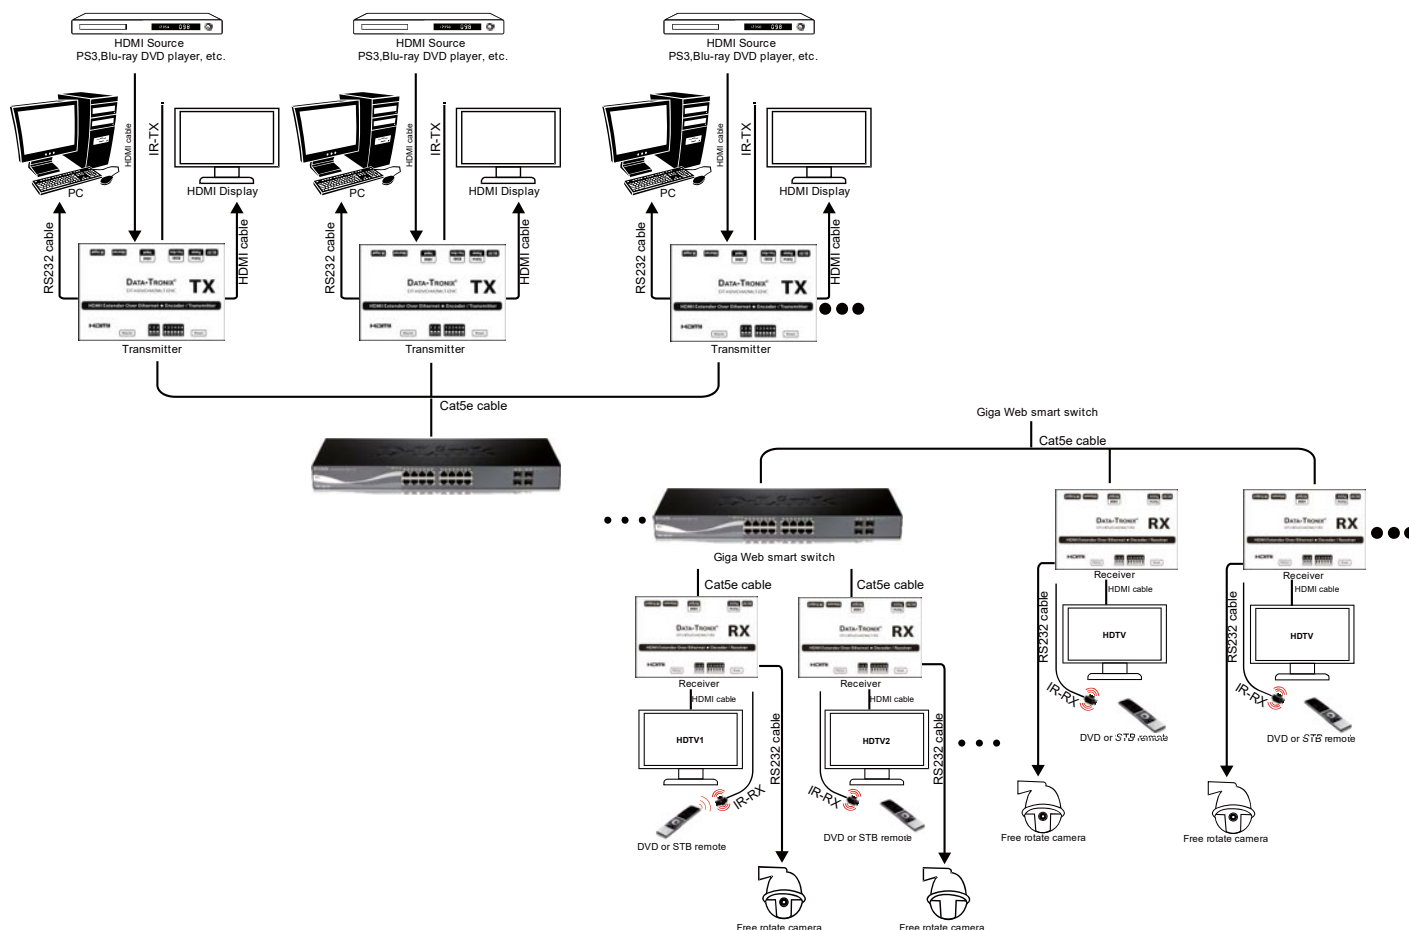

Cat5e & Cat6 Cable In Stock In All Locations!

DATA-TRONIX®

Features:


- Four pair, 24 AWG Solid conductors
- Unshielded
- With rip cord
- Available in Blue, Gray, White, Yellow, Green, Pink or Black PVC Jackets
- Convenient, 1,000' easy pull box
- TIA/EIA 568-B.2, UL 444, and ISO/IEC 11801
- RoHS Compliant

Ordering Information:

DT-CAT5E-BX-BL	Cat5e 1,000' Box, Blue Jacket
DT-CAT5E-BX-GY	Cat5e 1,000' Box, Gray Jacket
DT-CAT5E-BX-WT	Cat5e 1,000' Box, White Jacket
DT-CAT5E-BX-YL	Cat5e 1,000' Box, Yellow Jacket
DT-CAT5E-BX-GN	Cat5e 1,000' Box, Green Jacket
DT-CAT5E-BX-PINK	Cat5e 1,000' Box, Pink Jacket
DT-CAT5E-BX-BK	Cat5e 1,000' Box, Black Jacket



Category 5e UTP Network Cable

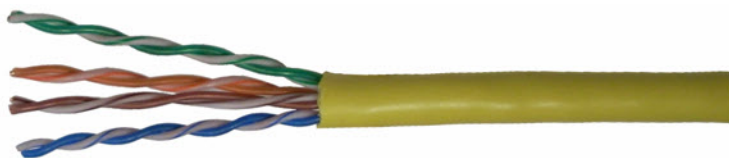

Cat5e Shielded,
Plenum & Direct
Burial Cables
Also In stock in
all locations!

DATA-TRONIX®

Features:

- Four pair, 23 AWG Solid conductors
- Rated to 500 MHz
- Unshielded, With rip cord
- Available in Blue, Gray, White, Yellow, Green or Black PVC Jackets
- Convenient, 1,000' easy pull box
- TIA/EIA 568-B.2, UL 444, and ISO/IEC 11801
- RoHS Compliant

Ordering Information:

DT-CAT6-BX-BL	Cat6a 1,000' Box, Blue Jacket
DT-CAT6-BX-GY	Cat6a 1,000' Box, Gray Jacket
DT-CAT6-BX-WT	Cat6a 1,000' Box, White Jacket
DT-CAT6-BX-YL	Cat6a 1,000' Box, Yellow Jacket
DT-CAT6-BX-GN	Cat6a 1,000' Box, Green Jacket
DT-CAT6-BX-BK	Cat6a 1,000' Box, Black Jacket



Category 6a UTP Network Cable



Cat6 Shielded,
Plenum & Direct
Burial Cables
Also In stock in
all locations!

Cat5e & Cat6 Cable In Stock In All Locations!

Features:

- 4 Pair twisted, 24 Awg Conductors
- Polyethylene tape
- Aluminum foil shielding, 100% coverage
- Tinned copper drain wire
- Blue PVC Jacket with rip cord
- UL Listed, CMR Rated
- Certified to 350 MHz, TIA/EIA-568B.2

DT-CAT5E-SHLD-BL \$121.90 / 1,000' Shielded Cat5e Cable



\$149.90 / 1,000'

CAT5E-DBGEL-BLK

Category 5e 24 AWG, 4 Pair Twisted, Outdoor Direct Burial, Gel Filled Cable, Black Jacket



CAT5E-WBLOCK-BLK \$149.90 / 1,000' Cat5e Direct Burial Cable

4 Pair, 24 awg, unshielded twisted pair (UTP),
350 MHz, inner foam wrap with rip cord,
outdoor direct burial black jacket



\$174.90 / 1,000'

CAT5E-PL-BL

Category 5e 24 AWG, 4 Pair Twisted, Unshielded Plenum Cable, Blue Jacket



\$144.90 / 1,000'

DT-CAT6-SHLD-BL

Category 6 23 AWG, 4 Pair Twisted, Shielded, 550 MHz, Blue Jacket



CAT6-WBLOCK-BLK \$171.90 / 1,000' Cat6 Direct Burial Cable


4 Pair, 23 awg, unshielded twisted pair (UTP),
550 MHz, inner foam wrap with rip cord,
outdoor direct burial black jacket



\$289.90 / 1,000'

CAT6-PL-BL

Category 6 23 AWG, 4 Pair Twisted, Unshielded Plenum Cable, Blue Jacket

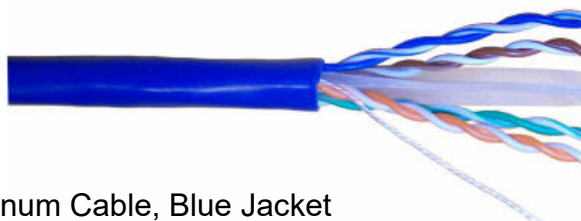



...competitive technologies
with compelling value

48" Tall Equipment Rack With Front Rails Threaded On Both Sides For Optional Set Back Equipment Mounting

Features:

- Front rails threaded on front and rear provide two mounting options
- Recessed mounting option allows room for equipment with front panel connections
- Rear rail option
- Black powder coat finish
- 10-32 Rack rail threading
- Base is predrilled for optional caster mounting
- 50.75" High, 20" Wide, 22.75" Deep
- Rear and front rail threading is aligned for level mounting of items that require four points of support

CTOR-48-D \$84.99

4' Equipment rack, 2 Post

CTOR-48-4-KIT-D \$49.99

Rear rail kit for CTOR-48-D



The CTOR-48-D is a free standing equipment rack for 19" rack mountable equipment. This rack features front rails that are threaded on the front and back allowing two options for equipment mounting. Mounting to the front side of the front rail holds equipment flush to the front of the rack. Mounting on the back side of the front rail holds equipment back 3 inches from the front of the rack allowing extra space for equipment with front panel connectors or extended front panel controls. The optional CTOR-48-4-KIT-D rear rail kit provides an additional two rear rails allowing for rear mounting of equipment or for heavy equipment that requires four points of support.

Specifications:

Overall Height 50.75"
Overall Width 20"
Depth of Base 22.75"
Overall Weight (with rear rails) 41.7 lbs.

Rack Front Clearance

Front of base to front of front rail 2"
Front of front rail to back of front rail 3"
Front of base to back of front rail 5"
Front of front rail to back of rear rail 20.75"
Back of front rail to back of rear rail 17.75"

Number of Rack Spaces

Front of Front Rail 26 RU (45.5)
Back of Front Rail 22 RU (38.5)
Back of Rear Rail 27 RU (47.25)

Ordering Information:

CTOR-48-D 4' Equipment rack, 2 Post, includes base, front rails and front crossbar
CTOR-48-4-KIT-D Rear rail kit for CTOR-48-D, includes 2 rear rails and top supports
CT-RMS-100 Heavy duty rack screws, 10-32 Threading, includes nylon washer
CT-CASTER-SET4-2WL Set of four casters, 2 locking



\$49.90

CT-CASTER-SET4-2WL

Set of Four Casters, 2 Locking, 2 Non-Locking



\$14.90

CT-RMS-100

100 Pack Cabletronix
heavy duty rack screws with washers



...competitive technologies
with compelling value

Flush Mount LED TV Mounts

With Integrated Bubble Level



CT-LED-024B LED TV Bracket Mount For 32"-55" TVs

- Easy mounting design
- Built in bubble level
- Universal mounting patterns
- Overall mount dimensions 484x97mm/19"x3.8"
- VESA: 200x200,300x300,400x200,400x400
- Super Slim design sits just 14.5mm from wall to complement the sleek look of ultra-thin TVs
- Pull-down cords enable easy display attachment and detachment
- Click stand feature holds TV away from wall for cable installation
- Material: Steel
- Color: Black
- Loading Capacity: 50kg/110lbs
- UL Listed



\$16.95
Call For Bulk Pricing




The CT-LED-024B super slim wall mount is designed to emphasize the sleek look of ultra-thin flat-panel TVs by placing them just 14.5mm from the wall. Its pull-down cords enable easy display attachment and detachment. It supports most 32"-55" flat-panel TVs up to 50kgs/110lbs. Its click stand holds TV away from wall for cable installation. VESA compatible up to 400x400.

CT-LED-026B LED TV Bracket Mount For 37"-70" TVs

- Easy mounting design
- Integrated bubble level assures easy installation alignment
- Universal mounting patterns
- Overall mount dimensions 684x97mm/27"x3.8"
- VESA: 200x200,300x300,400x200,400x400,600x400,600x600
- Super Slim design sits just 14.5mm from wall to complement the sleek look of ultra-thin TVs
- Pull-down cords enable easy display attachment and detachment
- Click stand feature holds TV away from wall for cable installation
- Material: Steel
- Color: Black
- Loading Capacity: 50kg/110lbs
- UL Listed




\$17.95
Call For Bulk Pricing




The CT-LED-026B super slim wall mount is designed to emphasize the sleek look of ultra-thin flat-panel TVs by placing them just 14.5mm from the wall. Its pull-down cords enable easy display attachment and detachment. It supports most 37"-70" flat-panel TVs up to 50kgs/110lbs. Its click stand holds TV away from wall for cable installation. VESA compatible up to 600x400.

CT-LED-755F LED TV Bracket Mount For 32"-55" TVs

- Easy mounting design
- Built in bubble level
- Universal mounting patterns
- Overall mount dimensions 550x432mm/21.65"x17"
- VESA: 200x200,400x200,300x300,400x400
- Super Slim design sits just 13.0mm from wall to complement the sleek look of ultra-thin TVs
- Pull-down cords enable easy display attachment and detachment
- Material: Steel
- Color: Black
- Loading Capacity: 40kg/88lbs
- UL Listed



\$21.95
Call For Bulk Pricing



With an impressively low 0.51" (13mm) mounting profile, the CT-LED-755F is a super slim mount perfectly suited for those applications where seamless integration counts most. It supports most 32"-55" flat panel TVs up to 40kg/88lbs. The new series is part of the Ultra Low Profile Series of fixed mounts offering a sleek and slim design together with simple installation.

HD CCTV BOSS Series

3.5" Installation & Test Meter

For TVI, CVI, AHD & Analog

Features:

- 3.5 inch screen display, 480 x 320 resolution
- Perfect for testing analog, HD-TVI, HD-CVI and AHD cameras
- Adjustable LCD screen brightness / contrast / color saturation
- Automatically adapts and displays NTSC and PAL video formats
- Enhanced Color bar generator
- HD coaxial test, analog PTZ control, color bar generator shortcut key
- F1, F2 user-defined key
- PTZ control and PTZ protocol analysis
- PTZ address scan and ID search
- Multi-protocol. Supports more than thirty PTZ protocols including PELCO-P and PELCO-D
- PTZ protocol analysis, control protocol command displays to check RS485 transmission
- PTZ control. Pan/tilt the PTZ unit, zooms in/out the lens, adjusts the focus, aperture and sets the preset position
- Network cable and Telephone cable testing, display sequence of connections and the number of LAN cables
- Supports RS232/RS485, baud rate 600 - 115200bps adjustable
- Built in Lithium Ion Polymer Battery (3.7V DC 3000mAh)
- Employs advanced power control and protection circuit
- Battery life up to 11 hours of normal use after charging for 3 - 4 hours
- Image display and data control integration
- Audio input test, tests the audio signal from pickup devices
- Easy to carry and operate

Description:

The SecurityTronix HD CCTV BOSS Series of meters were designed for maintenance and installation of HD-CVI, HD-TVI, (SDI ST-HDoC-MM), AHD and analog cameras as well as other security equipment. Their 3.5" 480 x 320 resolution screen enables them to display images from HD cameras and analog cameras in top quality. The units support HD over coax, PTZ, ONVIF PTZ and analog PTZ controls. In addition, these testers are also great tools for Ethernet networks and cabling systems. They include the ability to test network cables while verifying the sequence of the individual conductors. The meters portability, user-friendly design and multi-function capability make them an essential tool for installers and technicians, greatly improving work efficiency and simplifying installations and system maintenance.

Ordering Information:

ST-HDoC	3.5" Test Meter For Analog, TVI, CVI, AHD & Analog
ST-HDoC-MM	3.5" Test Meter For Analog, TVI, CVI, AHD, SDI & Analog With integrated Multi-Meter



CCTV Installation Meter Comparison



HD CCTV BOSS Series



ST-HDoC

Display Size	IP Camera Testing	Analog Video Testing	CVI Testing	TVI Testing	AHD Testing	SDI Testing	Internal PoE	Multi Meter	Cable Tracer	WiFi	Battery Type
3.5" TFT LCD Screen	N/A	✓	✓	✓	✓	N/A	N/A	N/A	N/A	N/A	3000 mAh
\$269.00											



ST-HDoC-MM

3.5" TFT LCD Screen	N/A	✓	✓	✓	✓	✓	N/A	✓	N/A	N/A	3000 mAh
\$309.00											

IP BUDDY+ Series



ST-IP-TEST

7" LCD Touch Screen	✓	✓	N/A	N/A	N/A	N/A	✓	N/A	✓	✓	6600 mAh
\$440.00											



ST-SDI-TEST

7" LCD Touch Screen	✓	✓	N/A	N/A	N/A	✓	✓	✓	✓	✓	6600 mAh
\$589.00											



ST-HDoC-TEST-MM

7" LCD Touch Screen	✓	✓	✓	✓	✓	N/A	✓	✓	✓	✓	6600 mAh
\$649.00											



ST-HDoC-TEST-MINI

4.3" LCD Touch Screen	✓	✓	✓	✓	✓	N/A	✓	N/A	N/A	✓	5000 mAh
\$449.00											

IP Series Cameras



\$88.00

IP-NC312-MB

2MP IP Fixed Lens
Mini-Bullet Camera with IR



\$125.00

IP-NC304-MB

4MP IP Fixed Lens
Mini-Bullet Camera with IR



\$88.00

IP-NC312-TD

2MP IP Fixed Lens Mini-Dome
Camera with IR



\$199.00

IP-NC312-VDA

2MP IP Varifocal
Dome Camera with IR



\$299.00

IP-NC304-VDZ

4MP IP Motorized Varifocal
Lens Dome Camera with IR



\$125.00

IP-NC304-TD

4MP IP Fixed Lens Mini-Dome
Camera with IR



\$196.00

IP-NC312-VBA

2MP IP Varifocal
Bullet Camera with IR



\$299.00

IP-NC304-VBZ

4MP IP Varifocal Lens Bullet
Camera with IR



\$99.00

IP-NC312-XD

2MP IP Fixed Lens
Turret Dome Camera with IR



\$152.00

IP-NC302-WDA

2MP IP Fixed Lens IR
Wedge Dome Camera



\$169.00

IP-NC304-WDA

4MP IP Fixed Lens IR
Wedge Dome Camera



\$149.00

IP-NC304-XD

4MP IP Fixed Lens
Turret-Dome Camera with IR

IP Series Cameras

SECURITY TRONIX®
THE IMAGE OF QUALITY



\$535.00

IP-NCA06-FE

6 Megapixel IP Fisheye Camera
with IR

IP-NP302-IR/30X

2MP IP
Varifocal
PTZ
IR Dome
Camera



\$839.00

IP-NP302-OD

2MP IP
Varifocal
PTZ
Dome
Camera



\$669.00

IP-NP112-ID

2MP IP
Indoor PTZ
Camera



\$454.00



IP-NP302-IR

2MP IP
Varifocal
PTZ
IR Dome
Camera



\$729.00

PTZ Camera Mounts

For Use With TVI-AP112-OD, TVI-AP312-IR, IP-NP112-OD, IP-NP302-IR,
IP-NP302-IR-30X & IP-NP302-OD Cameras



PTZ-CMPL \$37.00
PTZ Corner Mount
6.81" x 4.13" x 7.64"



PTZ-PMPL \$37.00
PTZ Pole Mount
5" x 1.81" x 9.84"



PTZ-CPM-S
Call For Pricing
PTZ Ceiling Mount, Short
4.6" x 7.87"



PTZ-JBPW
Call For Pricing
PTZ Junction Box
15.61" x 8.23" x 12.20"



\$454.00

IP-NP112-OD

2MP IP
Outdoor
PTZ
Camera



PTZ-WMP-L \$28.00
PTZ Wall Mount, Long
3.81" x 7.16" x 12.0"



PTZ-WMP-S
Call For Pricing
PTZ Wall Mount, Short
4.33" x 5.70" x 7.44"



PTZ-CPM-L \$28.00
PTZ Ceiling Mount, Long
4.6" x 19.68"

IPKB-1005KI

IP Pan-Tilt-Zoom Camera Controller

\$220.00



HD-TVI Series Cameras

HD 1080p Video Over Coaxial Cable



\$102.00

TVI-AC314D-OD4Z
2MP HD-TVI Motorized Lens IR
Dome Camera



\$102.00

TVI-AC314D-VB4Z
2MP HD-TVI Motorized Lens
IR Bullet Camera



\$59.00

TVI-AC314-FB4
2MP HD-TVI Fixed Lens
IR Bullet Camera



\$69.00

TVI-AC314-FD4 (3.6mm Lens)
TVI-AC314-FD4-2.8 (2.8mm Lens)
2MP HD-TVI Fixed Lens
IR Turret Dome Camera



\$46.00

TVI-AC314-MB
2MP HD-TVI Fixed Lens
IR Mini-Bullet Camera



\$52.00

TVI-AC314-OD
2MP HD-TVI Fixed Lens
IR Dome Camera



\$79.00

TVI-AC314-VD4
2MP HD-TVI Vari-focal Lens
IR Turret Dome Camera



\$89.00

TVI-AC314-VD4Z
2MP HD-TVI Motorized Lens
IR Turret Dome Camera



\$558.00

TVI-AP312-IR
2MP HD-TVI
Outdoor IR
PTZ Camera

TVI-AP112-ID
2MP HD-TVI
Indoor PTZ
Camera

\$345.00



TVI-AP112-OD
2MP HD-TVI
Outdoor
PTZ Camera

\$345.00



TVR-AR314 Series

Recorders for TVI, AHD, IP and Analog

Key Features:

- Compatible with HD-TVI, AHD, IP and analog cameras
- Supports HDCAM-C protocol for connecting cameras over coax
- H.264+ compatible for high video quality with low bitrates
- Simultaneous HDMI, VGA and CVBS outputs
- HDMI/VGA output at up to 1920 x 1080p resolution for TVR-AR314-4 and TVR-AR314-8; up to 4K (3840 x 2160) resolution for TVR-AR314-16
- One-key recording configurable
- Playback at up to 256X speed
- Supports 1080p lite mode for real-time 1080p lite & 720p lite resolution
- Instant playback for assigned cameras during multi-channel live view mode
- Up to 4/8/16-ch synchronous playback at 1080p resolution
- Playback by smart search and VCA search

4 Input	\$78.00
8 Input	\$115.00
16 Input	\$237.00

Ordering Information:

TVR-AR314-4	4 Channel recorder for TVI, AHD, IP and Analog
TVR-AR314-8	8 Channel recorder for TVI, AHD, IP and Analog
TVR-AR314-16	16 Channel recorder for TVI, AHD, IP and Analog



HD-COAXINATOR TVI™

NVR Series with Integrated PoE

Key Features:


- Third-party network cameras supported
- Up to 6 Megapixels resolution recording
- Up to 2 SATA interfaces
- HDMI and VGA output at up to 1920x1080P resolution
- 4/8/16-ch network cameras can be connected with 25M/50M/100M incoming bandwidth
- Plug & Play with 4, 8 or 16 independent PoE network interfaces
- Supports network detection, including network delay, packet loss, etc



4 Input	\$127.00
8 Input	\$194.00
16 Input	\$307.00

Ordering Information:

NVR-NR31P4-4	4 Channel NVR with integrated PoE
NVR-NR31P8-8	8 Channel NVR with integrated PoE
NVR-NR31P6-16	16 Channel NVR with integrated PoE



NVR-NR51P6-32

32 Input NVR with 16 PoE Ports

Key Features

- Dual-OS design to ensure high reliability
- H.265/H.264/MPEG4 video formats
- Up to 32 IP cameras can be connected
- Recording at up to 12 MP resolution
- Connectable to the third-party network cameras
- Supports live view, storage, and playback of the connected camera at up to 12 MP resolution
- Up to 4 SATA interfaces connectable for recording and backup
- Storage space effectively saved by 50% to 70% with the use of H.264+ decoding format
- 1 self-adaptive 10M/100M/1000M network interface
- 16 independent PoE network interfaces are provided
- Supports VCA detection alarm
- Instant playback for assigned channel during multi-channel display mode
- Smart search for the selected area in the video; and smart playback to improve the playback efficiency
- Supports HDD quota and group modes; different capacity can be assigned to different channels



32 Input \$598.00

Ordering Information:

NVR-NR51P6-32	32 Input NVR with 16 Integrated PoE Ports
---------------	---



Western Digital Purple Series Hard Drives for 24/7, always-on, high-definition security systems

WD10PURX	1 Terabyte, 64MB (6Gb/s), IntelliPower (RPM), SATA3	\$91.00 ea.
WD20PURX	2 Terabyte, 64MB (6Gb/s), IntelliPower (RPM), SATA3	\$130.00 ea.
WD30PURX	3 Terabyte, 64MB (6Gb/s), IntelliPower (RPM), SATA3	\$172.00 ea.
WD40PURX	4 Terabyte, 64MB (6Gb/s), IntelliPower (RPM), SATA3	\$229.00 ea.
WD60PURX	6 Terabyte, 64MB (6Gb/s), IntelliPower (RPM), SATA3	\$346.00 ea.



New Commercial Grade Symphonic Designs Amplifier & Speakers



SD-MA240W

...acoustically designed
For a sound investment

Four Zone Audio Mixing Amplifier, 70V / 100V

Features:

- Four output zones
- 19" Rack mountable
- 240W Power rating
- 70V / 100V
- Designed for residential or commercial applications
- Total harmonic distortion of less than 0.5% at 1kHz rated power
- Professional quality at an affordable price

\$289.90 ea.



The Symphonic Designs SD-MA240W is a professional quality, four zone mixing amplifier with excellent features and a variety of inputs and outputs. This unit is perfect for mixing inputs from USB, Bluetooth, MP3 recorder/players, tape decks, CD players and a variety of other audio sources and distributing them to up to four output zones. The SD-MA240W can be racked in a standard 19" rack or set on a shelf for stand alone use.

The Symphonic Designs SD-MA240W mixing amplifiers have been designed with the quality conscious commercial integrator in mind. Designed for commercial use, these mixing amplifiers are perfect for a wide variety of custom installations.

SD-CSP6.5-1 6 1/2" In-Ceiling Recessed Speakers

Features:

- 6 1/2" Frameless in-ceiling recessed speaker
- 60 Hz - 20 Khz Frequency response
- 60 Watts RMS power
- Kevlar woven cone woofer
- Titanium dome tweeter
- 8 Ohm Impedance
- White paintable grill
- Grill attaches magnetically
- Sold as each

\$32.90 ea.



SD-INDCL-6.5 6 1/2" In-Ceiling 70V Recessed Speaker

Features:

- 6 1/2" Frameless in-ceiling recessed speaker
- 70 Hz - 20 Khz Frequency response
- 50 Watts RMS power
- Mineral filled polypropylene cone woofer
- PET dome tweeter
- 8 Ohm Impedance
- White paintable grill
- Grill attaches magnetically
- Sold individually

\$69.99 ea.





*...acoustically designed
for a sound investment*

6.5" Low Profile Outdoor Rock Speaker SD-LPSPKR-6.5

Features:

- Weatherproof outdoor speaker
- Perfect for gardens, playgrounds and theme parks
- 70V Transformer
- 6.5" Woofer, 1.2" Tweeter
- 80 Hz - 20 Khz Frequency response
- Mineral filled polypropylene cone woofer
- 60 Watts RMS power
- Titanium dome tweeter
- 8 Ohm Impedance
- IP56 Weather rating
- 12.6" x 9.1" x 10.65"
- Sold individually

\$169.99 ea.



Weatherproof Outdoor Speaker SD-ODS-GN

Features:

- 5.25" Woofer, 1.2" Tweeter
- Weatherproof outdoor speaker
- Perfect for gardens, playgrounds and theme parks
- UV Protected
- 70V Transformer
- 360° Horizontal x 40° vertical coverage
- 60 Hz - 20 Khz Frequency response
- Mineral filled polypropylene cone woofer
- 60 Watts RMS power
- Titanium dome tweeter
- 8 Ohm Impedance
- IP56 Weather rating
- Sold individually

\$169.99 ea.



5.25" Weatherproof Outdoor Speaker SD-ODS5.25-1

Features:

- 5.25" Weatherproof outdoor speaker
- 60 Hz - 20 Khz Frequency response
- 60 Watts RMS power
- Mineral filled polypropylene cone woofer
- Titanium dome tweeter
- 8 Ohm Impedance
- Black aluminum grill
- IP56 Weather rating
- Sold individually

\$54.90 ea.





Ruckus™
Simply Better Wireless.



Q: WHAT'S BETTER THAN RUCKUS WIFI GEAR FOR YOUR WIRELESS NETWORK?

A: RUCKUS WIFI GEAR SPEC'D AND SOLD BY NACE.

NACE Technology Solutions is a full-service, authorized Ruckus Reseller. We'll guide you through every step of your network upgrade, from creating a WiFi coverage heatmap of your property, to ensuring that every component is the exact fit for the job for optimal performance. That's the NACE difference.



Ruckus ZoneFlex R300
PoE Access Point - 2.4/5 GHz -
300 Mbps - Wi-Fi



Ruckus ZoneFlex R310
PoE Access Point - 2.4/5 GHz -
1167 Mbps - Wi-Fi



Ruckus ZoneFlex R500
PoE Access Point - 2.4/5 GHz -
Wi-Fi



Ruckus ZoneFlex 7055
PoE Access Point - 2.4/5 GHz -
600 Mbps - Wi-Fi




Ruckus ZoneFlex H500
PoE Access Point - 2.4/5 GHz -
Wi-Fi




Ruckus ZoneFlex 7372
PoE Access Point - 2.4/5 GHz -
300 Mbps - Wi-Fi

Ruckus hardware is designed to create a single, comprehensive wireless network solution, without the enterprise-level expense of some solutions

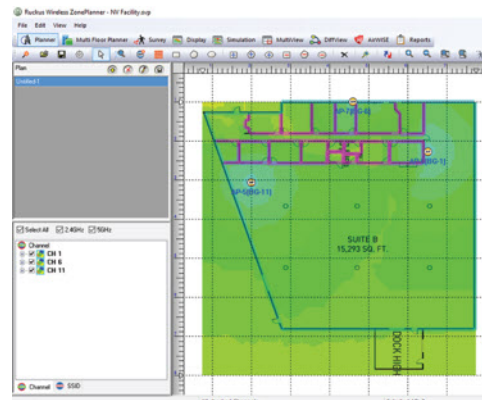

Heat map of a typical facility, showing access points and WiFi signal coverage

NACE
1085 Andrew Dr. Suite A
West Chester, PA 19380



Scan This QR Code To Go
To Our Current Specials Page!



New Audio
Mixing
Amplifier &
Outdoor Speakers



Pages
17 - 18

USB
Charging
Wall Plates



See
Page 2

DATA-TRONIX®



Commercial & Residential
Satellite & Video Equipment

CCTV Meters, Recorders, HD & IP Cameras

Pages 11 - 16



SECURITY TRONIX®
THE IMAGE OF QUALITY



Toll Free Order Line
(800) 688-9282

Web: www.nace.tv
Email: sales@nace.tv



NACE Website



NACE Catalog



NACE Brands

West Chester, PA

St. Peters, MO

Las Vegas, NV