




FRMMAT - Rubber Mat For Non-Penetrating Roof Mounts

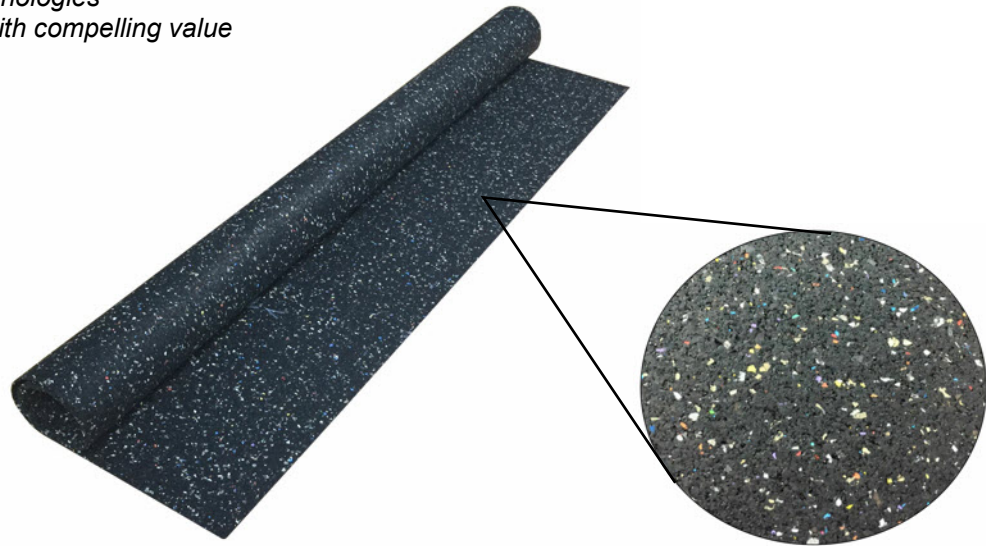

PROPERTY	TEST METHOD	TYPICAL RESULT	UNIT
Density	ASTM D297	1.0	g/cm ³
Tensile Strength	ASTM D412, Die C	180	lbs./in ²
Elongation	ASTM D412, Die C	75	percent
Compression @ 100 psi	ASTM F36	20	percent
Recovery		88	percent
Shore A Hardness	ASTM D2240	60	points
Tear Strength	ASTM D624, Die C	65	lbs./in
Flexibility	ASTM F147	0-1	factor
Compression Set B 25% deflection, 22 hrs. 158°F	ASTM D395	40	percent
Coefficient of Friction	ASTM D4521	1.2	

Description:

FRMMAT Rubber mat for non-penetrating roof mount, 42" x 36" x 0.08"

This specification sheet is still dynamic; values may change with additional test data.
The values shown represent current production and may vary under different conditions.

Email: sales@cabletronix.com

Web: www.cabletronix.com