


HCVR5216A-S2

16 Input HD-CVI DVR, Tribrid 720P-Pro 1U



Features:

- Support HDCVI/Analog/IP Video input
- H.264 dual-stream video compression
- ONVIF Version 2.4
- HDMI/VGA simultaneous video output
- Supports 2 SATA HDDs up to 8TB, 2 USB2.0
- All channel 720P realtime or 1080P non-realtime recording
- 16 channel synchronous realtime playback, GRID interface & smart search
- 3D intelligent positioning with Dahua PTZ dome camera
- Multiple network monitoring: Web viewer, CMS(DSS/Smart PSS)&Smart Phone(DMSS)

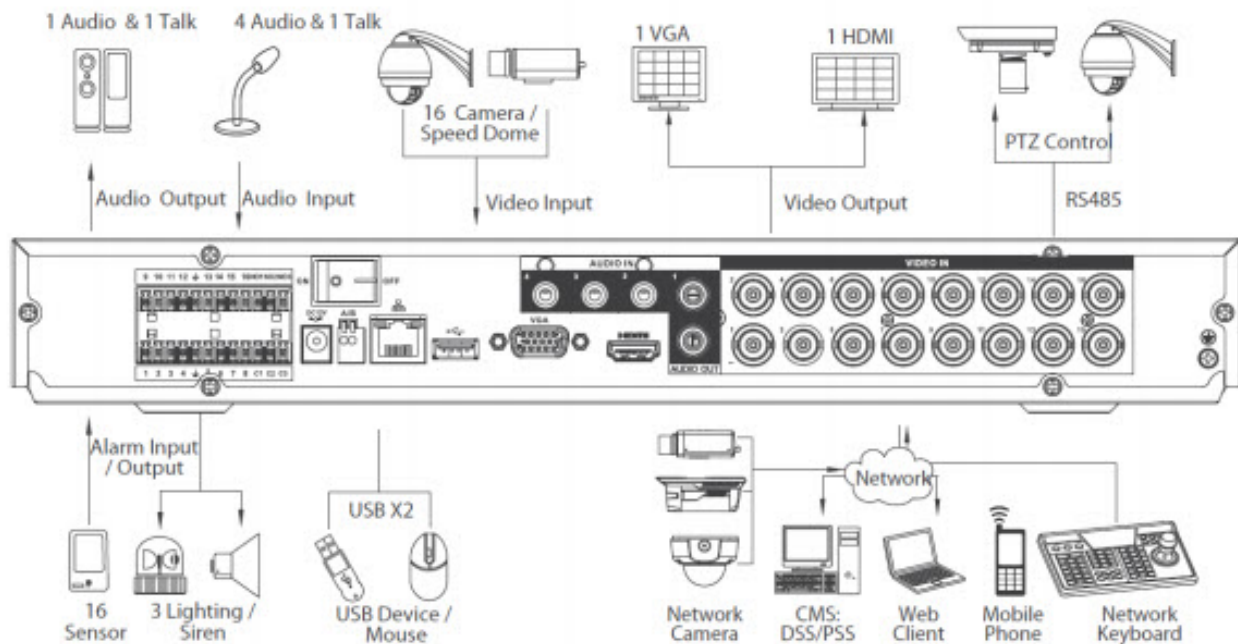

Ordering Information:

HCVR5216A-S2 16CH Tribrid 720P-Pro 1U HD-CVI DVR

North American Cable Equipment Inc.

(800) 688-9282

email: sales@northamericancable.com

www.northamericancable.com

HCVR5216A-S2

16CH Tribrid 720P-Pro 1U HD-CVI DVR



Specifications:

System		
Main Processor		Embedded processor
Operating System		Embedded LINUX
Video		
Input		16 channel, BNC
Standard	Analog	NTSC/PAL
	HDCVI	1080P/720P HDCVI Camera
	IP	Support 2ch 1080P/720P IP Camera
Audio		
Input		4 channel, RCA
Output		1 channel, RCA
Two-way Talk		Reuse audio input/output channel 1
Display		
Interface		1 HDMI, 1 VGA
Resolution		1920×1080, 1280×1024, 1280×720, 1024×768
Display Split		1/4/8/9/16
Privacy Masking		4 rectangular zones (each camera)
OSD		Camera title, Time, Video loss, Camera lock, Motion detection, Recording
Recording		
Video/Audio Compression		H.264/G.711
Record Rate	Main Stream:	1080P(1~15fps)/720P/960H/D1 (1~25/30fps)
	Extra Stream	CIF/QCIF(1~25/30fps), D1
Bit Rate		96~4096Kb/s
Record Mode		Manual, Schedule(Regular(Continuous), MD), Stop
Record Interval		1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec
Video Detection & Alarm		
Trigger Events		Recording, PTZ, Tour, Alarm out, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips
Video Detection		Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank
Alarm Input		16 channel
Relay Output		3 channel
Playback & Backup		
Sync Playback		1/4/9/16
Search Mode		Time/Date, MD & Exact search (accurate to second)
Playback Functions		Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom
Backup Mode		USB Device/Internal SATA burner/Network
Network		
Ethernet		RJ-45 port (10/100M/1000M)
Network Functions		HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP, P2P
Max. User Access		128 users
Smart Phone		iPhone, iPad, Android, Windows Phone
Storage		
Internal HDD		2 SATA ports, up to 8TB
Auxiliary Interface		
USB Interface		2 ports(1 Rear), USB2.0
RS485		1 port, For PTZ control
General		
Power Supply		DC12V/5A
Power Consumption		15W(without HDD)
Working Environment		-10℃ ~+55℃ / 10%~90%RH / 86~106kpa
Dimension(W×D×H)		1U, 375mm×285mm×55mm
Weight		2.35KG(without HDD)

North American Cable Equipment Inc.

(800) 688-9282

email: sales@northamericancable.com

www.northamericancable.com