
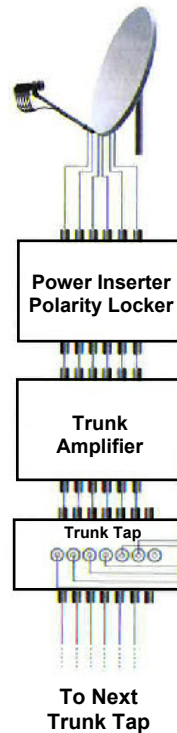
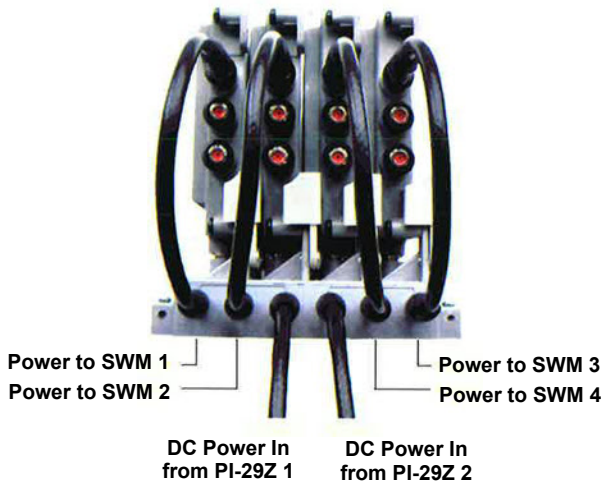


SWM-EXPNDR-P-R0-09

SWM Expander Module to Hold Up to 4 DSWM-30

Features:

- Holds up to 4 DSWM-30
- Six Satellite Inputs
- Two power inputs (from PI-29Z)
- Four power outputs (to DSWM-30)
- Four ground lugs
- Wall mountable
- Unused ports are auto terminated
- Requires 1 PI-29Z power supply for every two modules
- Will not power the LNB, external polarity locker is required
- Not compatible with legacy SWM-8/16/32 units
- For indoor use

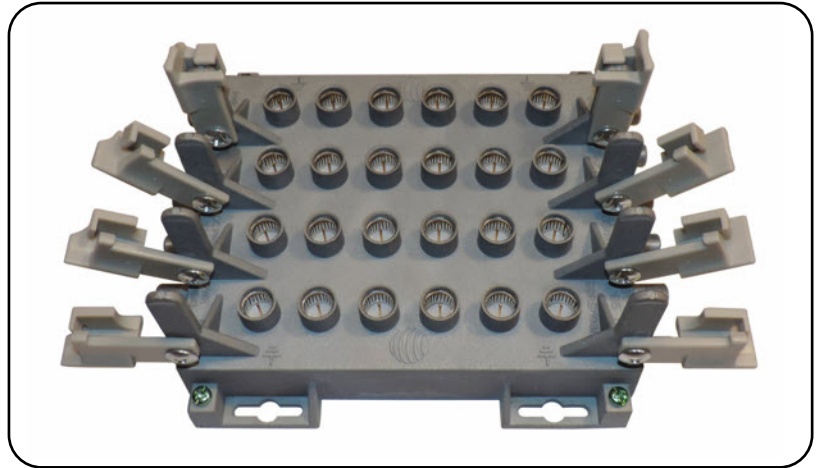

Specifications:

Impedance:	75 Ohm
Frequency Range:	250 - 2150 Mhz
Insertion Loss:	<12 dB
Number of Input Ports:	6 satellite ports
Port to Port Isolation, Input to Output:	>35 dB
Return Loss On All Ports:	12.0 dB, 250-750 MHz, 950-1450 MHz and 1650-2150 MHz
DC Voltage at the 2 DC Inputs:	29VDC
DC Internal Power Consumption:	<3 Watts
DC Voltage at the 6 RF Inputs:	0 Volts
Environmental Requirements:	Indoor or Lock Box Installation
Dimensions:	5.8 x 7.1 x 3.1"
Ground Lugs	Four, One at each corner of the housing
Mounting Tabs	Four, One at each corner of the housing

Ordering Information:

SWM-EXPNDR-P-R0-09	4 Module SWM Expander
PI-29Z	29VDC Power supply / power inserter
DSWM-30	DSWM Multiswitch

