


How to replace the blade DT-RJ45-RPLBLADES on the DT-RJ45-CRIMPTOOL Crimper

Part Numbers: DT-RJ45-RPLBLADES and DT-RJ45-CRIMPTOOL



STEP 1

Tools Required:
Phillips screwdriver
Flat head screwdriver

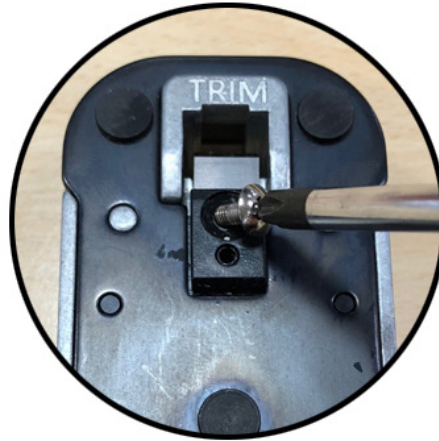


STEP 2

Loosen the screw of the trimming blade.




STEP 3

Take off the screw, and put it aside.

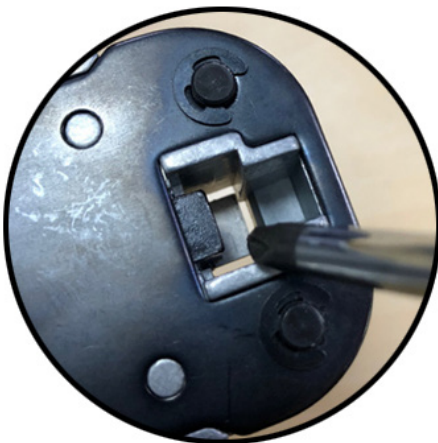

STEP 4

Turn to the other side of the tool, take the tool up, and use the front end of the screwdriver to knock the trimming blade a couple times, so the trimming blade could come off the tool a little bit.

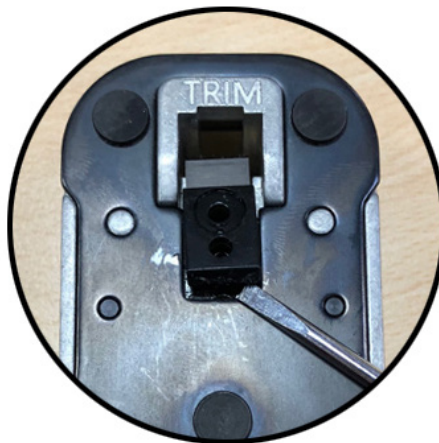

STEP 5

Turn to the original side of the tool, use the flathead screwdriver to force the trimming blade to come off completely.



STEP 6

Place the new blade onto the crimper, and use the Phillips screwdriver to tighten it.